




ACHD-1006

THE **ACHD-SERIES** IS A DOUBLE ACTING HOLLOW PISTON ROD ALUMINUM CYLINDER.

The hollow piston allows for a rod or cable to be inserted through the entire body length, while the double acting design improves speed of operation when longer stroke cylinders are required. They can be used in tensioning, load testing and maintenance applications where weight and portability are paramount. All cylinders incorporate a steel base plate for extra protection.

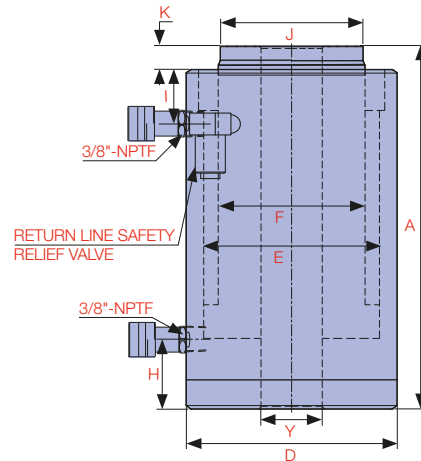

Model Number	Cylinder Capacity ton* / max.			Stroke (in)	Cylinder Effective Area		Oil Capacity		A Collapsed Height (in)	B Extended Height (in)	D Outside Diameter (in)	E Cylinder Bore Diameter (in)
	ton*	Advance	Retract		Advance (in ²)	Retract (in ²)	Advance (in ³)	Retract (in ³)				
ACHD-303	30	34.8	18.6	2.95	6.85	3.66	20.20	10.80	10.63	13.58	4.53	3.35
ACHD-304		34.8	18.6	3.94	6.85	3.66	26.97	14.40	11.61	15.55	4.53	3.35
ACHD-306		34.8	18.6	5.91	6.85	3.66	40.46	21.54	13.58	19.49	4.53	3.35
ACHD-3010		34.8	18.6	9.84	6.85	3.66	67.43	35.88	17.52	27.36	4.53	3.35
ACHD-503	50	59.3	24.7	2.95	11.69	4.87	34.54	14.40	11.02	13.98	5.91	4.33
ACHD-504		59.3	24.7	3.94	11.69	4.87	46.01	19.16	12.01	15.94	5.91	4.33
ACHD-506		59.3	24.7	5.91	11.69	4.87	69.02	28.74	13.98	19.88	5.91	4.33
ACHD-603	60	70.4	34.8	2.95	13.87	6.85	41.01	20.20	11.61	14.57	6.69	4.92
ACHD-604		70.4	34.8	3.94	13.87	6.85	54.62	26.97	12.60	16.54	6.69	4.92
ACHD-606		70.4	34.8	5.91	13.87	6.85	81.95	40.46	14.57	20.47	6.69	4.92
ACHD-1003	100	112.4	55.6	2.95	22.15	10.96	65.42	32.34	12.99	15.94	8.86	6.50
ACHD-1004		112.4	55.6	3.94	22.15	10.96	87.20	43.14	13.98	17.91	8.86	6.50
ACHD-1006		112.4	55.6	5.91	22.15	10.96	130.83	64.69	15.94	21.85	8.86	6.50

* Nominal Cylinder Capacity in ton - see max. values for actual capacity



HARDENED GROOVED LOAD CAP

to prevent piston rod damage.
Optional tilt saddles available

GLAND NUT

withstands full dead end loading

CYLINDER BORE

has a special anodizing treatment to resist wear, corrosion and damage

LIGHTWEIGHT

high strength aluminum materials

COMPACT SEAL

resists wear and extrusion

BEARING SURFACE

large area to protect against side loading

MILD STEEL BASE PLATE

protects base

ANODIZED FINISH

resists damage

PISTON ROD WIPER

reduces contaminants and improves service life of cylinder

SAFETY PRESSURE

relief valve protects cylinder from intensification

HANDLE

is removable

PLATED STEEL INNER TUBE

for maximum corrosion resistance

PISTON ROD

has a special anodizing treatment to resist wear, corrosion and damage

PARKER

industry standard high flow couplings for compatibility



CAPACITY RANGE



30 - 100 ton

STROKE RANGE

2.95 - 9.84 in

MAXIMUM OPERATING PRESSURE

10,150 psi



F Piston Rod Diameter (in)	H Base to Advance Port (in)	I Top to Return Port (in)	J Standard Load Cap Diameter (in)	K Load Cap Protrusion from Piston Rod (in)	L PCD x No. of Holes	M Thread Size	Thread Depth (in)	Y Center Hole Diameter (in)	Weight (lbs)
2.56	1.97	2.56	2.44	0.63	90 x 2	M10	0.67	1.30	16.5
2.56	1.97	2.56	2.44	0.63	90 x 2	M10	0.67	1.30	18.1
2.56	1.97	2.56	2.44	0.63	90 x 2	M10	0.67	1.30	20.3
2.56	1.97	2.56	2.44	0.63	90 x 2	M10	0.67	1.30	25.4
3.54	2.17	2.56	3.43	0.71	110 x 2	M12	0.79	1.65	32.0
3.54	2.17	2.56	3.43	0.71	110 x 2	M12	0.79	1.65	34.2
3.54	2.17	2.56	3.43	0.71	110 x 2	M12	0.79	1.65	38.6
3.94	2.28	2.76	3.82	0.71	125 x 2	M12	0.79	2.13	41.9
3.94	2.28	2.76	3.82	0.71	125 x 2	M12	0.79	2.13	44.1
3.94	2.28	2.76	3.82	0.71	125 x 2	M12	0.79	2.13	49.6
5.31	2.76	2.95	5.12	1.10	165 x 2	M16	0.94	3.03	79.4
5.31	2.76	2.95	5.12	1.10	165 x 2	M16	0.94	3.03	84.9
5.31	2.76	2.95	5.12	1.10	165 x 2	M16	0.94	3.03	94.8



Caution...

Lightweight **aluminum cylinders** are **not** designed for production applications. Consult Durapac for details on high cycle applications